

PROTEZIONE FERRITI PER SALDATURA HF TUBI

FERRITE CORE'S CASING FOR HIGH FREQUENCY TUBE WELDING



TYPE OF DUTY	NORMAL	MEDIUM	HEAVY
COLOUR	GREEN	BROWN	WHITE
DIELECTRIC CLASS	G11	G11	G11
OPERATING TEMPERATURE °C	150-180	180-220	260-300



DISPONIBILI TONDI O A SEZ RETTANGOLARE O QUADRA
AVAILABLE ROUND , RECTANGULAR AND SQUARE SECTIONS

DISPONIBILI DA Φ 4 ÷ 250 mm

AVAILABLE FROM STOCK FROM Φ 4 ÷ 250 mm

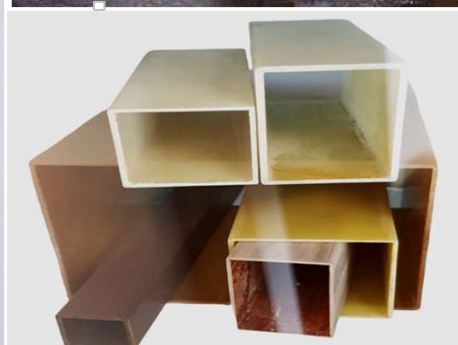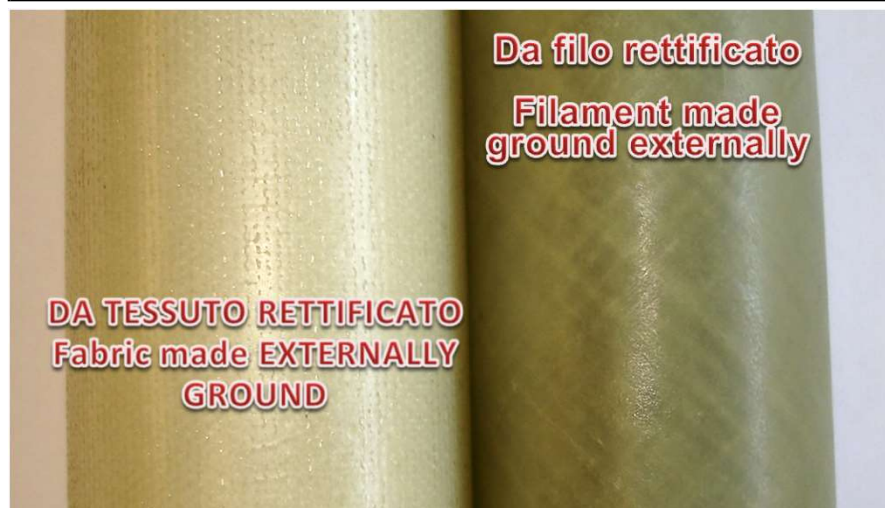

TUBI IN QUARZO PER BRIGHT ANNEALING
QUARTZ TUBES FOR BRIGHTH ANNEALING

SPECIALI + POLVERE DI FERRITE E RIVESTITI IN PTFE
SPECIAL FILLED WITH FERRITE AND PTFE COATED



BARRE IN CELERON PER TAPPI E RACCORDI

CELERON BARS FOR END STOPPERS AND THREADINGS

DISPONIBILE DA Φ 5 ÷ Φ 120 mm

AVAILABLE FROM Φ 5 ÷ Φ 120 mm

APPLICAZIONE = per tappi e raccordi impedis

APPLICATION = impedisers for end stoppers and fittings

Resina Epossidica

Bicomponente

Bi-Component Epoxy Resin



EPOXY RESIN
extra impeder
protection